

POPULAR OPTIONS



SINGLE AXLES

Rear Gates & Ramps



G03 - 3' Fold Gate Tubing w/Exp. Metal



G05 - 4' Split Fold Gate Tubing w/Exp. Metal



GF1 - Front Fold Gate



GS1 - 4' Side Fold Gate



GS4 - Side Rail Ramps

Fenders & Sides



F01 - Smooth Plate Round Fenders (weld-on)



F02 - Smooth Plate Round Fenders (removable)



F07 - Diamond Plate Alum. Round Fenders (removable)



Q04 - Exp. Metal Sides 36"



R04 - Solid Metal Sides 36"

LED Lights, D-Rings & Spare Tire Mount



L03 - Lighting LED



M02 - D-Rings 3" Weld On



M04 - D-Rings 4" Recessed 360 Rotational Bolt On



TM1 - Spare Tire Mount

Couplers



C01 - Coupler 2" A-Frame Cast



C06 - Coupler 2-5/16" A-Frame Stamped



C07 - Coupler 2-5/16" Adjustable 4 Hole



C11 - Pintle Ring 3" Adjustable 6 Hole

QUICK REFERENCE

GVWR	GAWR	Coupler	Chain	Jack	Tire	Wheel
2,000	2,000 (ea axle)	2" Straight Tube	1/4" w/Safety Latch Hook	No Jack	4.80-12	12" 5-Hole
3,500	3,500 (ea axle)	2" A-Frame Cast	1/4" w/Safety Latch Hook	5,000 Lb Top Wind	205/75 R15 Radial	15" 5-Hole
5,200	5,200 (ea axle)	2" A-Frame 7,000 Lb	1/4" w/Safety Latch Hook	5,000 Lb Top Wind	205/75 R15 Radial	15" 5-Hole

AUTHORIZED DEALER



220 FM 2216 • Sumner, Texas 75486

903-783-3900 • www.loadtrail.com

Product information and specifications are subject to change without notice.



Available In:

Bumper Pull Only
 G.V.W.R.: 1,500 to 5,200
 Width: 48" 60" 77" 80" 83" & 96"
 Length: 8' - 16'
 Fender Width: 9" per Fender



Available Colors:

Stock photos. May be shown with optional equipment.

Standard Features on 3,500 lb G.V.W.R. SB

- 2" A-Frame 7,000 Lb Coupler
- 1/4" Grd. 30 w/Safety Latch Hook Chain
- 5,000 Lb Top Wind Swivel Jack
- 1-3,500 Lb Cambered Idler (Spring)
- 15" X 5" 5-Hole Wheels
- 205/75 R15 Tires
- Multi-Leaf Springs
- Removable Smooth Plate Fenders
- 4" Channel Tongue
- 4" Channel Frame
- 2" X 2" X 3/16" Angle Iron Crossmembers
- 2" X 2" X 1/8 Angle Iron Uprights
- Removable Side Rails
- 2" X 2" X 1/8 Angle Iron Top Rail
- Treated Wood Floor
- D.O.T. Stop, Tail, Turn, Clearance Lights
- Mechanical and/or Chemical pretreatment for maximum Paint Adhesion, Finish (prep)
- DTM Polyurethane Coating System



LOAD TRAIL • 220 FM 2216 • Sumner, Texas 75486 • 903-783-3900 • www.loadtrail.com

STANDARD SPECIFICATIONS



AVAILABLE OPTIONS

7,000 G.V.W.R.



Length: 60" X 10'
Weight:* 1,344 Lbs
**[Base Weight Estimate Only]*

SH

Stock photo. May be shown with optional equipment.

Standard Features, 7,000 lb G.V.W.R. (7,000 ea axle) SH

Coupler: 2-5/16" Adjustable 6-Hole
Axles: 1 - 7,000 lb Electric Torsion Axle
Frame: 3" X 5" Angle Iron
Tongue: 4" Channel (4.5 lbs/ft)
Tilt: Tilt Deck
Crossmembers: 3" Channel on 16" Centers
Floor: Steel Floor Diamond Plate
Lights: D.O.T. Stop, Tail, Turn and Clearance
Finish Coat: DTM Polyurethane Coating

2,990 G.V.W.R.



Length: 48" X 8' 764 Lbs
48" X 10' 860 Lbs
60" X 8' 865 Lbs
60" X 10' 979 Lbs
60" X 12' 1,093 Lbs
60" X 14' 1,250 Lbs
60" X 16' 1,377 Lbs
77" X 10' 1,112 Lbs
77" X 12' 1,243 Lbs
77" X 14' 1,416 Lbs
77" X 16' 1,565 Lbs
83" X 10' 1,166 Lbs
83" X 12' 1,307 Lbs
83" X 14' 1,490 Lbs
83" X 16' 1,645 Lbs
**[Base Weight Estimate Only]*

SE

Stock photo. May be shown with optional equipment.

Standard Features, 2,990 lb G.V.W.R. (3,500 ea axle) SS

Coupler: 2" A-Frame 5,000 lb Stamped
Axles: 1-3,500 lb Cambered Idler (Spring)
Jack: 5,000 lb Top Wind Swivel
Frame: 2-1/2" X 2-1/2" X 3/16" Angle Iron
Tongue: 3" Channel
Side Rails: 13" Sides weld-on
Crossmembers: 2" X 2" X 3/16" Angle Iron
Lights: D.O.T. Stop, Tail, Turn and Clearance
Finish Coat: DTM Polyurethane Coating

2,990 G.V.W.R.



Length: 96" X 14'
Weight:* 1,579 Lbs
**[Base Weight Estimate Only]*

TV

Stock photo. May be shown with optional equipment.


Standard Features, 2,990 lb G.V.W.R. (3,500 ea axle) TV

Coupler: 2-5/16" Adjustable
Axles: 1-3,500 lb Cambered Idler (Spring)
Frame: 4" Channel
Tongue: 4" Channel
Jack: 5,000 lb Top Wind Swivel
Crossmembers: 2" X 2" X 3/16" Angle Iron
Floor: Treated Wood
Lights: D.O.T. Stop, Tail, Turn and Clearance
Finish Coat: DTM Polyurethane Coating

Description:	SH	SS	SE	TV	SB
Tire Upgrades					
ST205/75 R15 LRC 8 Ply.		†	†	†	†
ST225/75 R15 LRD 8 Ply.		•	•	•	•
ST235/80 R16 LRE 10 Ply.	†				
ST235/85 R16 LRG 14 Ply.	•				
Couplers					
2" A-Frame 5,000 lb Stamped		†	†		
Coupler 2" A-Frame Cast		•	•		†
Coupler 2" A-Frame Cast Hyd.		•	•		•
Coupler 2" Adjustable		•	•		•
Coupler 2-5/16" Adjustable	†	•	•	†	•
Dove Tails					
2' Dove Tail		•	•		•
2' Diamond Plate On Dove Tail		•	•		•
Flooring					
Steel Floor DP	†	•	•		•
Mesh Floor		•	•		•
Rough Oak Floor		•	•	•	•
Douglas Fir Wood Floor		•	•	•	•
Fenders					
Smooth Plate Round Fenders (weld-on)		†	†		•
Smooth Plate Round Fenders (removable)					†
Diamond Plate Fenders (weld-on)	†	•	•		•
Diamond Plate Fenders (removable)					•
Diamond Plate Alum. Round Fenders (removable)					•
Gates & Ramps					
Rear Tail Gate Exp. Metal (even with sides)		•	•		•
Rear Tail Gate (even with sides)		•	•		•
3' Fold Gate Tubing w/Exp. Metal		•	•		•
3' Fold Gate Angle Iron w/Exp. Metal			•		•
4' Fold Gate Tubing w/Exp. Metal		•	•		•
4' Fold Gate Angle Iron w/Exp. Metal			•		•
4' Split Fold Gate Tubing w/Exp. Metal		•	•		•
4' Split Fold Gate Angle Iron w/Exp. Metal			•		•
5' Fold Gate Tubing w/Exp. Metal		•	•		•
4' Fold In Gate Tubing w/Exp. Metal		•	•		•
4' Fold In Gate Angle Iron w/Exp. Metal			•		•
Rear Tail Gate Solid Metal (even with sides)		•	•		•
4' Bi-Fold Gate w/Exp. Metal			•		•
Front Fold Gate			•		•
4', 5' & 6' Side Fold Gates			•		•
Side Rail Ramps			•		•
Slide In Ramps 18" X 60"				†	•
Snow Mobile Slide In Ramps 59" X 72"				•	•
Crossmembers					
16" Cross-Members	†	•	•	•	•

[• available option † standard feature]

2,990 G.V.W.R.

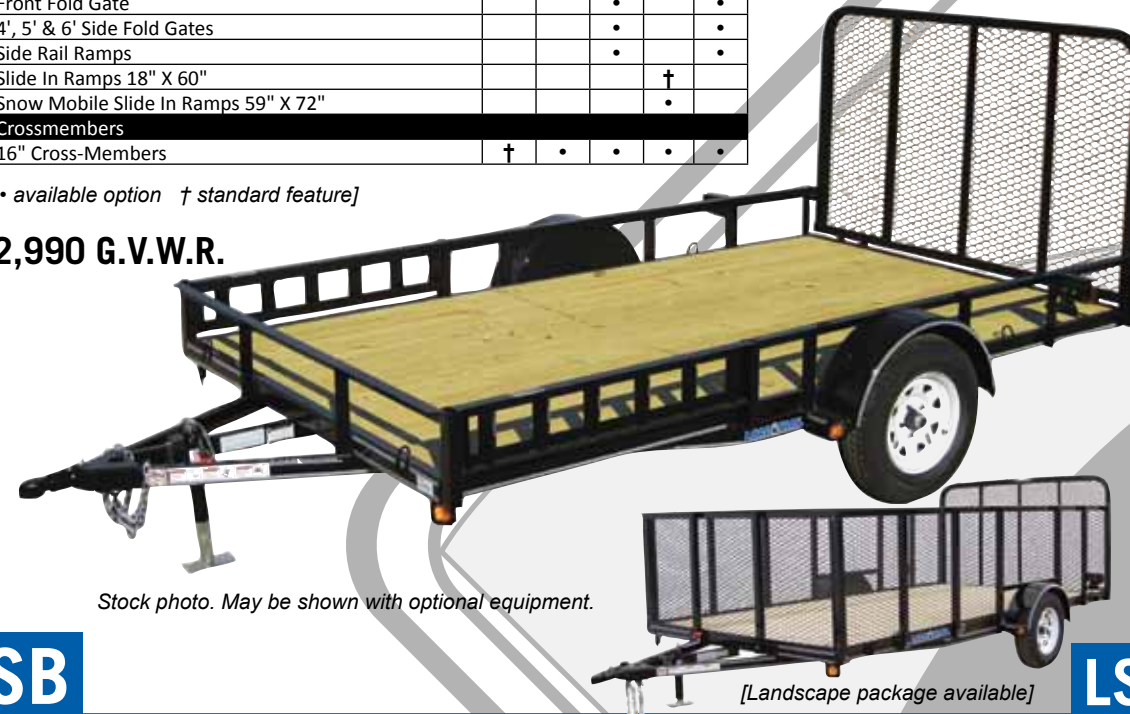

Stock photo. May be shown with optional equipment.

SB

Standard Features, 2,990 lb G.V.W.R. (3,500 ea axle) SB

Coupler: 2" A-Frame 7,000 lb
Axles: 1-3,500 lb Cambered Idler (Spring)
Frame: 4" Channel
Tongue: 4" Channel
Side Rails: 2" X 2" X 1/8" Angle Iron Removable
Crossmembers: 2" X 2" X 3/16" Angle Iron
Floor: Treated Wood
Lights: D.O.T. Stop, Tail, Turn and Clearance
Finish Coat: DTM Polyurethane Coating

LS

[Landscape package available]

Description:	SH	SS	SE	TV	SB
Jacks					
Jack A-Frame 2000 lb.		†	†		
Jack Swivel 5000 lb.	†	•		†	†
Lights					
Regular Lights	†	†	†	†	†
LED Lights	•	•	•	•	•
D-Rings					
D-Rings 4" Recessed 360 Rotational Bolt On	•	•	•	•	•
D-Rings 3" Weld On	•	•	•	•	•
D-Rings 3" Weld On (4 additional)	†	•	•	•	•
D-Rings 4" Weld On	•	•	•	•	•
Side Rails					
Angle Iron Side Rails (weld on)			†		•
2-3/8" Pipe Top Side Rails (weld on)			•		•
Sq. Tube Side Rails (weld on)			•		•
Angle Iron Side Rails (removable)					†
2-3/8" Pipe Top Side Rails (removable)					•
Sq. Tube Side Rails (removable)					•
Exp. Metal Sides 13"			•		•
Solid Metal On Sides 13"		†	•		•
Additional Options					
Tilt Deck	†	•	•		•
Rub Rail					•
Rear Support Stands			•	•	•
Spring Assist on Fold Gates			•	•	•
Diamond Plate Front Stone Guard					•
4 - Additional Stake Pockets			•	•	•
Front Tongue Mount Tool Box			•	•	•
Front Tool Cage			•	•	•
Spare Tire & Mount			•	•	•
Zinc Primer		•	•	•	•
Axle Options					
1 - 3,500 lb Idler Axle		†	†	†	†
1 - 3,500 lb Axle (1 Elec Brake)			•	•	•
1 - 3,500 lb Axle (1 Hyd. Brake)			•	•	•
1 - 7,000 lb Electric Torsion Axle	†				
Axles Available in Torsion & Drop					

Length: 48" X 8' 772 Lbs
48" X 10' 840 Lbs
60" X 8' 860 Lbs
60" X 10' 956 Lbs
60" X 12' 1,059 Lbs
60" X 14' 1,217 Lbs
60" X 16' 1,351 Lbs
77" X 10' 1,092 Lbs
77" X 12' 1,250 Lbs
77" X 14' 1,361 Lbs
77" X 16' 1,539 Lbs
83" X 10' 1,241 Lbs
83" X 12' 1,320 Lbs
83" X 14' 1,461 Lbs
83" X 16' 1,602 Lbs
**[Base Weight Estimate Only]*